


B) ADA CURBLESS SHOWERS,  
60"X30"ID AND 60"X36"ID, GELCOAT ONE-PIECE

**B2****G 6233 BF**


OD: 62"L x 33"W x 80"H,

ID: 60"L x 30"W

FRONT VIEW

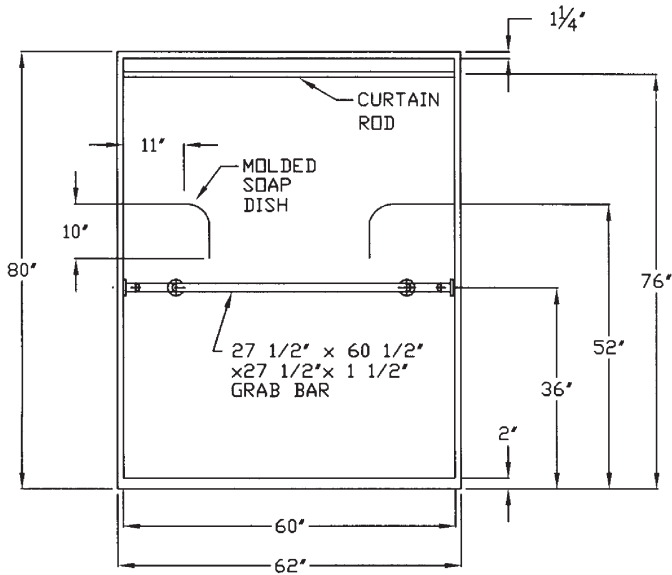

SIDE VIEW

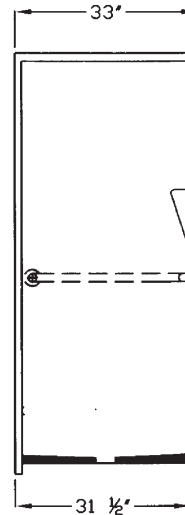

**ADA Compliant:** This unit complies with all specifications of ADA for accessible bathware.


**Special Notes:** This unit complies with ANSI 124.1 and shall meet the requirements for Uniform Plumbing Code administered by IAPMO, HUD, BOCA, and SOUTHERN BUILDING CODE.

**Warranty:** Gelcoat models have a 3 year limited warranty. Acrylic models have a 5 year limited warranty. Pumps, parts, and accessories 1 year limited warranty. For further details please refer to the complete warranty section.

Due to the nature of the materials, dimensions may vary  $\pm$  1/2".

**Check product prior to installation.**

TOP VIEW

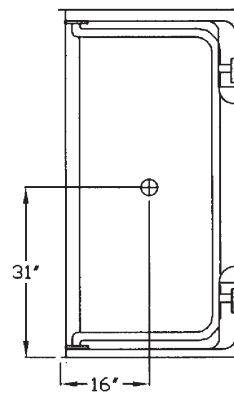

FRONT OF THRESHOLD

TRENCH

CROSS-SECTION OF THRESHOLD



ISO 9002  
Certificate Number  
34158

Job Name: \_\_\_\_\_

Model No.: **G 6233 BF**

Approved by: \_\_\_\_\_

Date: \_\_\_\_\_

Rep.: \_\_\_\_\_

Wholesaler: \_\_\_\_\_

**Aquarius Bathware**

435 Industrial Road,  
Savannah, Tennessee 38372  
731.925.7656  
800.443.7269  
Fax: 731.925.4290



**AQUARIUS**  
BATHWARE™

B) ADA CURBLESS SHOWERS,  
60"X30"ID AND 60"X36"ID, GELCOAT ONE-PIECE

**B2**

**G 6233 BF**

OD: 62"L x 33"W x 80"H,

ID: 60"L x 30"W



ISO 9002  
Certificate Number  
34158

## ADA Curbless Shower Stall

The shower enclosure shall be Aquarius Model G 6233 BF center, right or left. Finished surface shall be of a sanitary-grade polyester Gelcoat exhibiting a minimal thickness of 15 dry mils and a finished cured Barcol hardness of 80-90 as tested with ASTM D-2583. Unit construction shall be of molded reinforced fiberglass with a 15% minimum fiberglass content. The unit shall have outside dimensions of 62" x 33" x 80". The base shall be attached to the sump of the unit in such a manner as to form an integral part with an inner and outer coating of reinforced polyester resin. The unit shall meet ANSI 117.1, ANSI 124.2, ADA, HUD, BOCA, NAHB, UPC, and shall meet the requirements of Southern Building Code.

The enclosure shall be equipped with the following installed accessories:

- 1) one 27 1/2" x 60 1/2" x 27 1/2" wrap bar x 1 1/2" diameter, 18 gauge stainless steel grab bars with 1 1/2" safety statute clearance, mounted with stainless steel bolts and secured from the rear with a 3" x 3", 11 gauge metal mounting plate, 2) 1" diameter 20 gauge stainless steel curtain rod, 3) self caulking brass drain with chrome strainer, 4) 2" threshold.

Available options: 1) fold up seat, 2) hand held shower set (includes: hand set, 60" flex hose, swivel connector, vacuum breaker, brass nipple, lock nut and shower wall outlet), 3) pressure balance valve, 4) 24" or 30" slide guide, 5) weighted or non-weighted flame retardant anti-bacterial curtains with hooks, 6) "No Recess Necessary" threshold.

THIS UNIT FEATURES THE OUTSIDE DIMENSIONS OF 62" OF OVERALL WIDTH. THIS DOES NOT ALLOW FOR FULL ENCLOSURE OF THE BOLTS THAT ARE USED TO SECURE THE BARS AND SEAT IN PLACE. THE BOLT AND NUT COMBINATION SHOULD NOT PROTRUDE ANY MORE THAN 3/4" ON EITHER SIDE. THIS SHOULD NOT CREATE ANY TYPE OF INSTALLATION PROBLEMS EXCEPT FOR A DRY WALL ENCLOSED FIRE WALL INSTALLATION AREA THAT WOULD NOT ALLOW FOR ANY VARIATIONS. IN A STANDARD STUD /OPENING INSTALLATION THE EXTENSION OF THE HARDWARE SHOULD NOT CAUSE ANY TYPE OF PROBLEM.

NOTE: THIS UNIT WILL NOT ACCEPT A DOOR!

DUE TO THE NATURE OF THE MATERIALS  
DIMENSIONS MAY VARY  $\pm 1/2"$

**FOR A COMPLETE LISTING OF ACCESSORIES AND OPTIONAL FEATURES  
AVAILABLE FOR THIS MODEL PLEASE REFER TO PAGE 6 IN THE  
COMMERCIAL PRODUCT GUIDE BOOKLET.**



**AQUARIUS  
BATHWARE™**

*Aquarius Bathware*  
435 Industrial Road,  
Savannah, Tennessee 38372  
731.925.7656  
800.443.7269  
Fax: 731.925.4290

Job Name: \_\_\_\_\_

Model No.: **G 6233 BF**

Approved by: \_\_\_\_\_

Rep.: \_\_\_\_\_

Date: \_\_\_\_\_

Wholesaler: \_\_\_\_\_

WORLD LEADER IN ACCESSIBLE BATHWARE™

© 2003  
Specifications subject  
to change without notice.  
AB120030005